

## Goodwe SEMS Account Registration Guide – APP version

\* Please download the APP: SEMS Portal on your smart phone or tablet in advance.

### TO New Customer:

1. Click **Register** for creating the account > Select **Owner** and type in the E-mail together with password

English

English

Distributor Owner

SEMS

Email Address

Please input your password

Remember Forget password?

Login

Register Wi-Fi Configuration

SEMS PORTAL V2.0.2

2. Tap **Register** > **Submit** to log in the account > **create immediately** to add the station

Important Note

You are about to register with Goodwe@hotmail.com

Please confirm the accuracy as :

- 1.To prevent misregistration, we will send an email to the email address,which can be used to annotate the account.
- 2.The email address will also be used to reset password.

Cancel Submit

Register

Plants


There is no plant information in this account please create a plant first

Create Immediately


Plants Discovery

- Type in the basic info about your plant.
  - \* Plant Name: the station you want to name
  - \* Classification: select from residential, commercial or battery storage
  - \* Capacity: the solar system size
  - \* Profit Ratio: the feed in tariff
  - \* Click Map to locate your place

Push **Submit**.

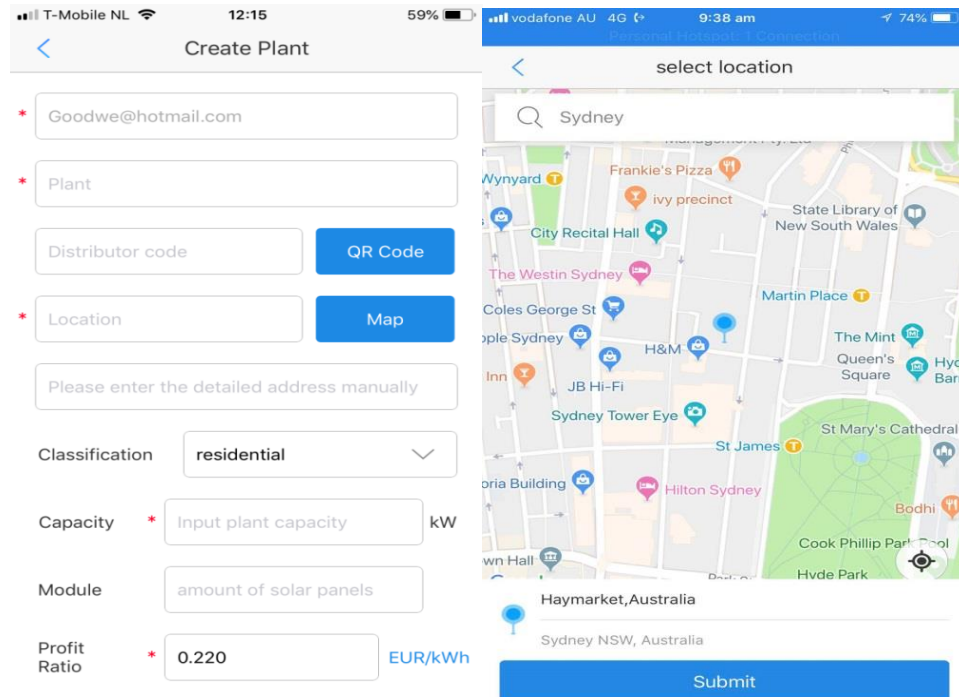

- SEMS will enquire for adding the inverter info to this created station, tap immediately add

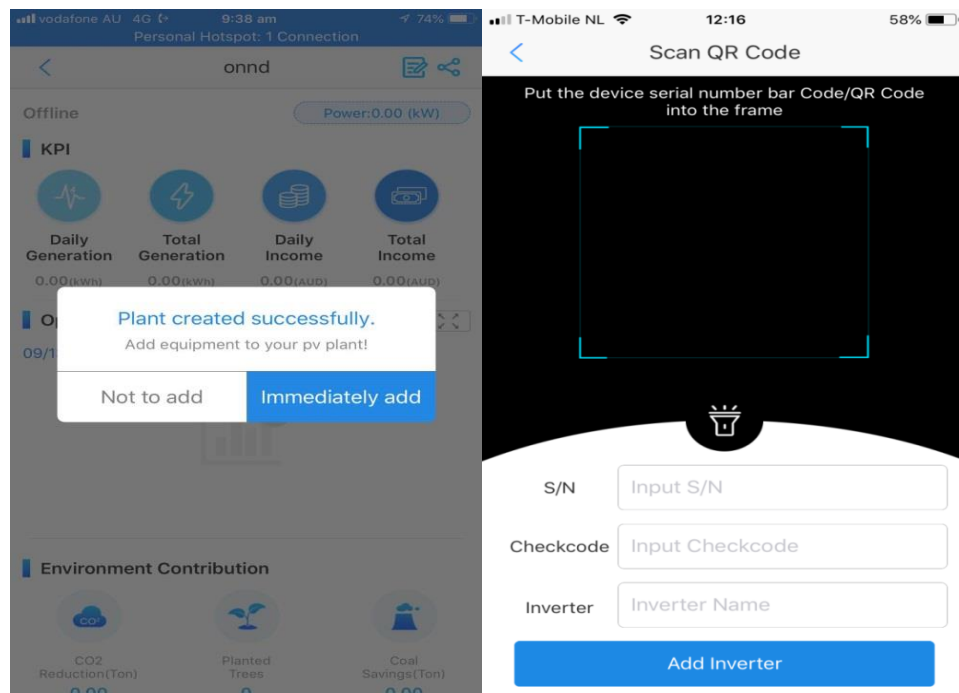


Customer who has activated the camera feature on APP can scan the bar code on right side of inverter to add inverter info automatically.

Customer whose APP does not active the camera can manually type in the inverter info (S/N, check code and inverter mode which can be found on label of right side of inverter). Then click **Add Inverter** then the portal registration finished.

**WiFi Connection Set up via SEMS:**

1. Once create the plant, click the WiFi set up button and click **Next**

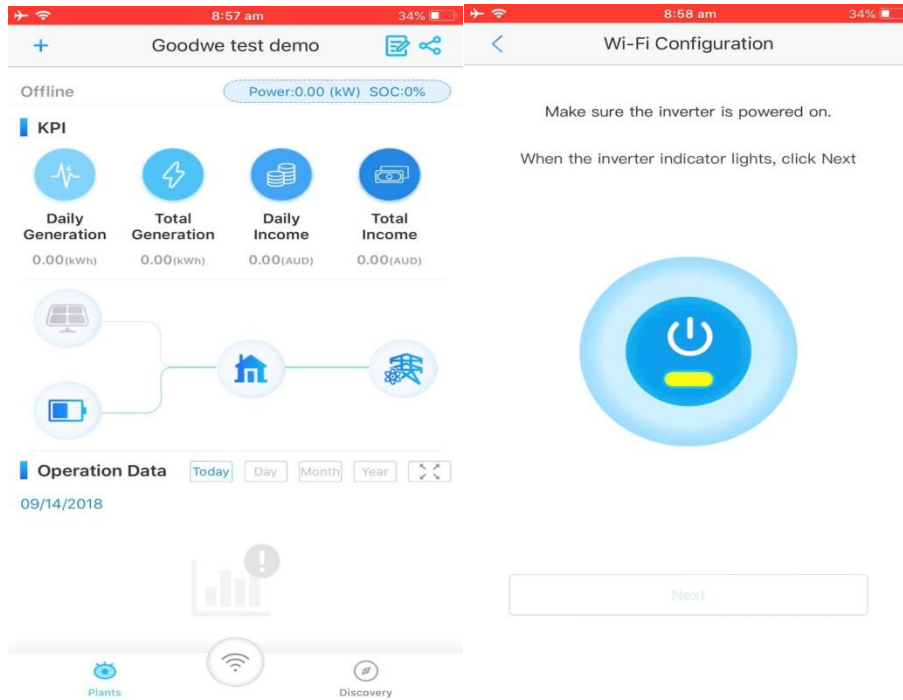


2. Go back to mobile wifi setting and connect to Solar WiFi (password: 12345678), back to SEMS APP and Tap **Next**




3. Select customer home wifi from list and type in the home wifi password (password is

case sensitive).

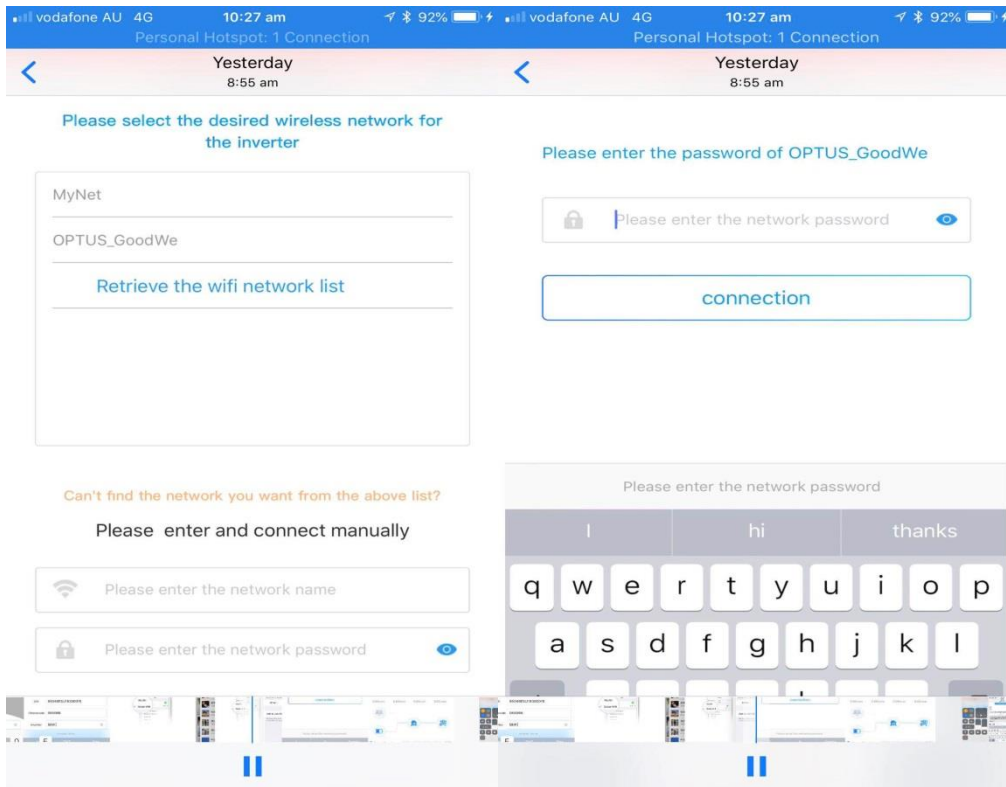

4. Tap **Connection**

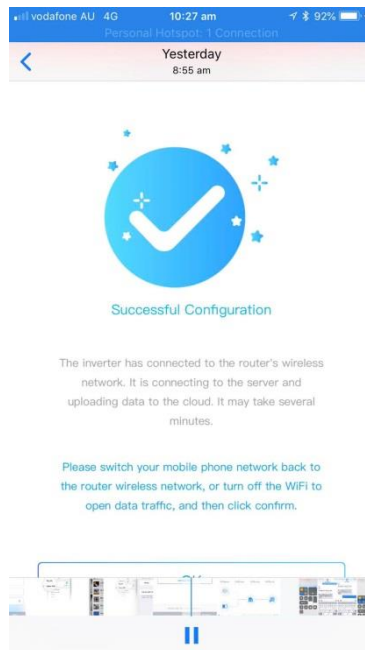


To string inverter, the amber light is solid once wifi connection is successful. To hybrid inverter, the WiFi LED light is solid once wifi connection is successful.

**To Customer who has portal account on old portal already:**

Directly Log in by **using the old account name and password.** The SEMS request the E-mail as account name for login.

For customer whose account has not been bundled with E-mail, SEMS reminds customer to

bundle with E-mail. Follow the pop out window to bundle with E-mail and **log in with the NEW E-mail as account name.**

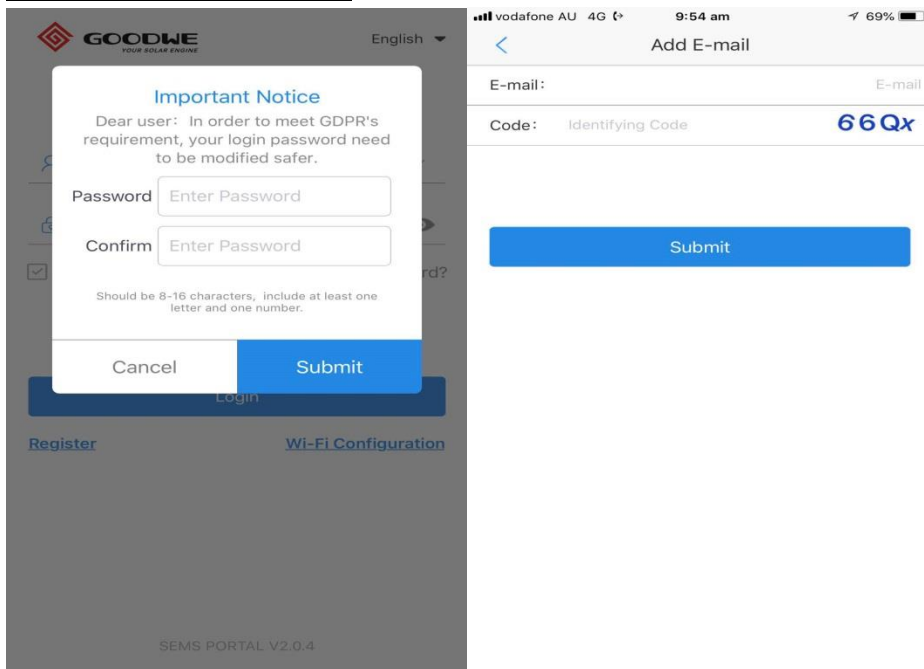

Please contact with Goodwe Australia local team if you have any question during the process.

*Goodwe Australia Service Team – 15/9/2018*